



LA SOLAR


TRIANGLE MODULE


25 YEAR WARRANTY

 High conversion efficiency


 Outstanding low irradiation performance

 Maximum use of rooftop

 Advanced aesthetics

 Excellent Durability

 Strong physical property

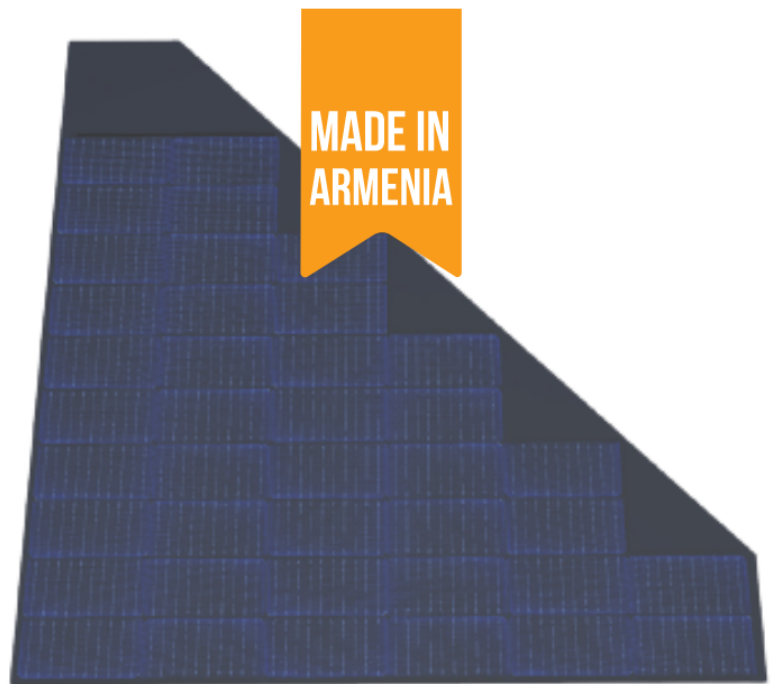

QUALIFICATIONS AND CERTIFICATES



Intertek
5020665



UL/IEC61215, UL/IEC61730
ANTI-PID IEC TS 62804-1:2015
ISO9001, ISO14001, ISO45001




Electrical Characteristics

Maximum Power (Pmax)*	150 W
Tolerance	+10%/-5%
Type of Cell	Monocrystalline silicon
Cell Configuration	40 in series
Open Circuit Voltage (Voc)	17 V
Maximum Power Voltage (Vpm)	20 V
Short Circuit Current (Isc)	8.8 A
Maximum Power Current (Ipm)	9.9 A
Maximum System (DC) Voltage	1500 V
Series Fuse Rating	15 A
NOCT	47.5°C
Temperature Coefficient (Pmax)	-0.37 % / °C
Temperature Coefficient (Voc)	-0.28 % / °C
Temperature Coefficient (Isc)	0.04 % / °C

Mechanical Characteristics

Dimensions (A x B)	1130.00 x 1130.00 mm
Cable Length	1300 mm
Connector	MC4
Weight	13.5 kg
Max Load	5400 Pascals

Qualifications

UL Listed	UL 61215, UL 61730
Fire Rating	Class C 

Warranty

25-year limited warranty
Contact LaSolar Factory for complete warranty information

